

HTL

3450/3460


Min.
110mm

1900mm
Max.

Capacity
5000/6000kg

5.0/6.0 Ton Clear Floor Two-post Lift

Automatic lock release, double piece column

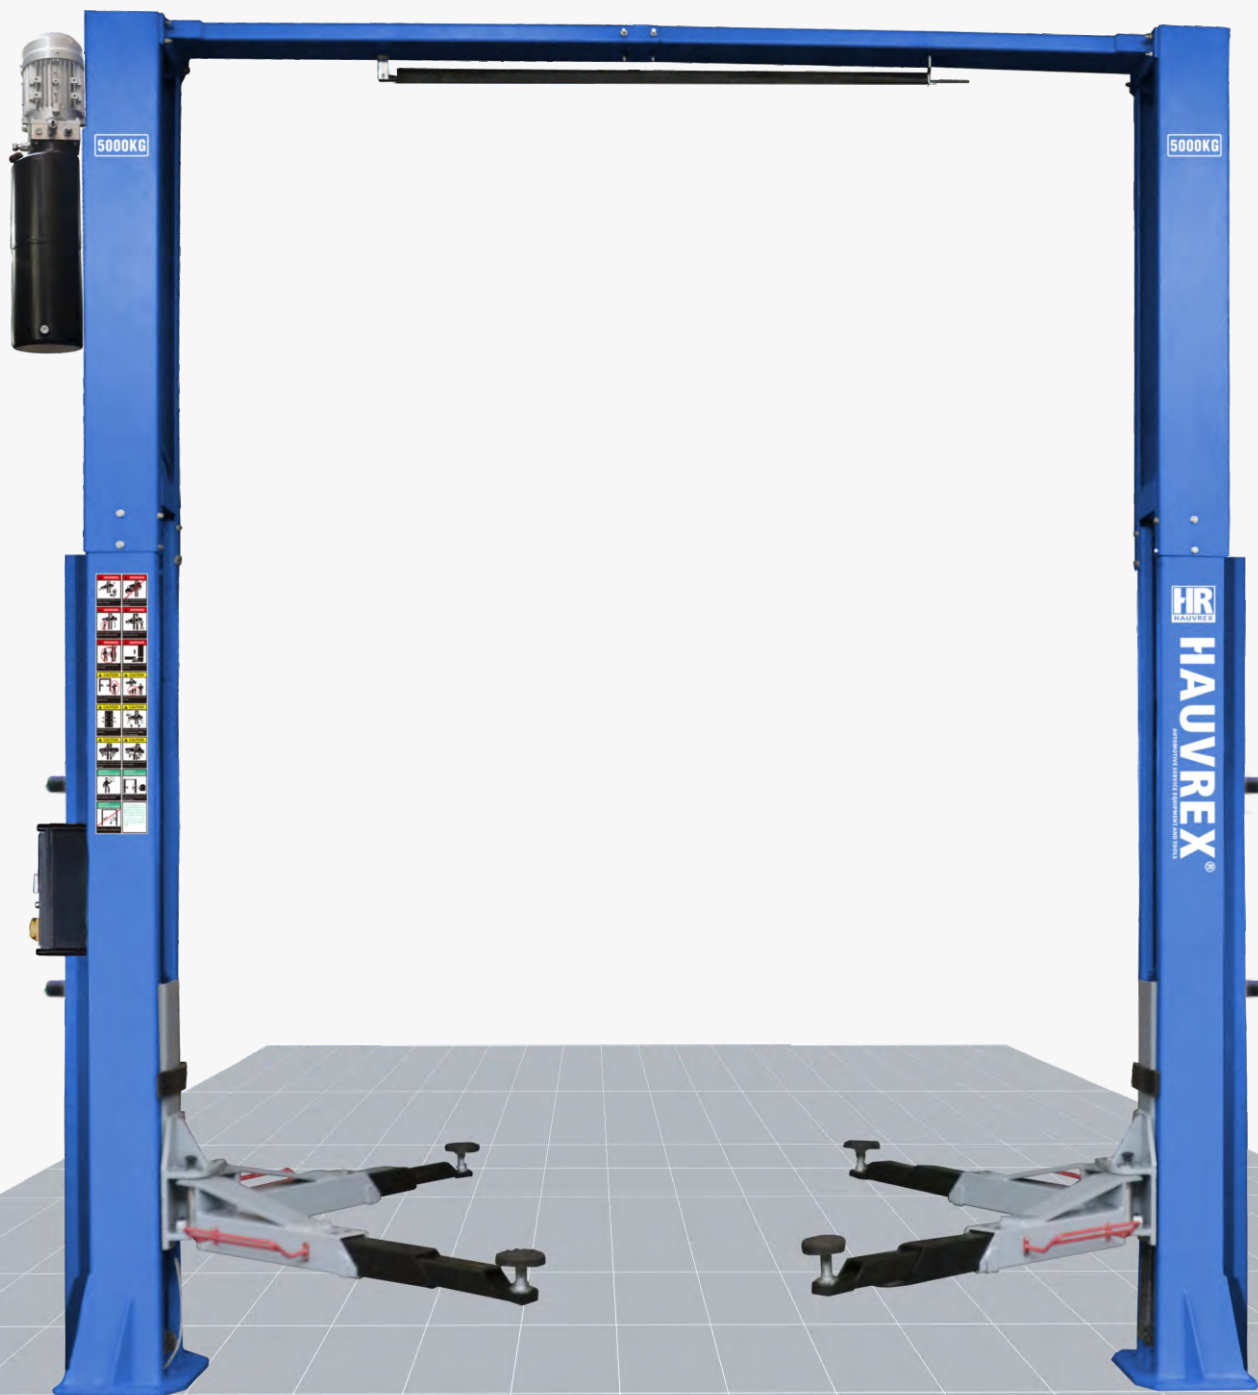

CE EAC

Technical Features



Control

24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH



Lifting Arms

Symmetric 3+3 stages lifting arms




Lifting Pads

Drop-in type dual stage threaded lifting arm pads




Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor




Arm Holder

C-type enclosed arm holder give more strength and safety




Foot Protection

Lifting arms equipped with foot protection bars



Door Protection



Anti-collision door protection rubber on carriages



Overhead Protection

Padded overhead protection bar automatically stops the lift should a vehicle come in contact with overhead structure.

Technical Drawing

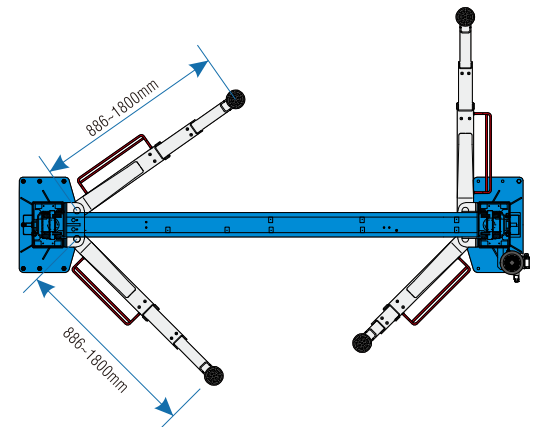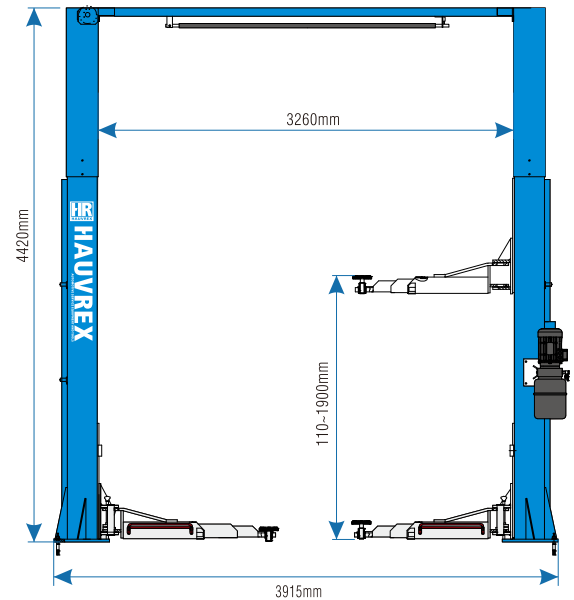

Technical Data

Lifting Capacity	5,000kg/6,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	4,420mm
Overall Width	3,915mm
Width between Posts	3,260mm
Lifting Arm Length	886~1800mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	3.0kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph