


HTL

2840



4.0 Ton Two-post Lift with Base

Automatic solenoid lock release

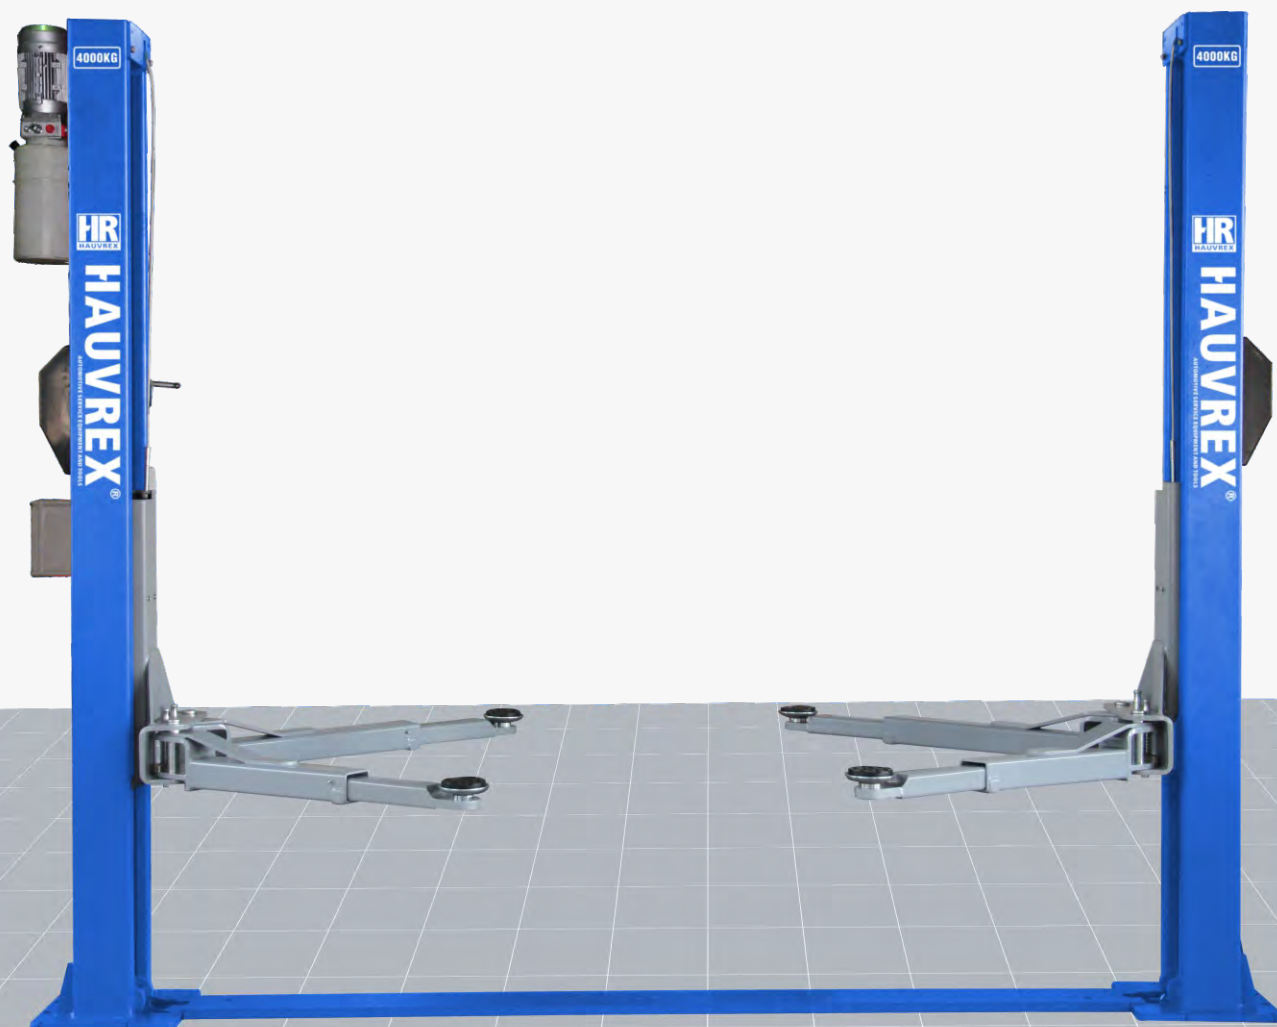


CE EAC

Technical Features



Control

24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH and emergency stop button



Lifting Arms

Asymmetric 2-stage lifting arms



Lifting Pad

Drop-in type lifting arm pad



Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



Arm Holder

C-type enclosed arm holder give more strength and safety



Safety Lock

Safety locks with automatic engagement and automatic solenoid lock release



Height Adaptor



Included truck & van adaptors ideals for trucks & vans with running boards or auxiliary fuel tanks



Door Protection

Anti-collision door protection rubber on carriages

Technical Drawing

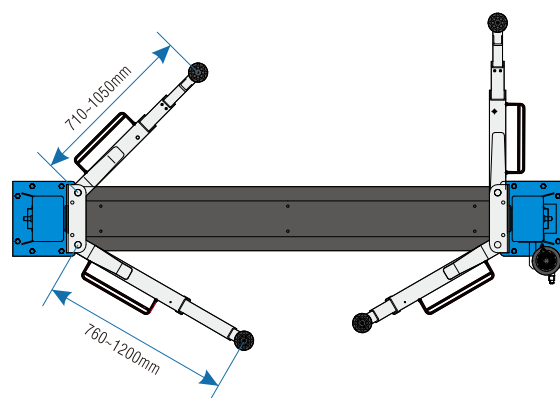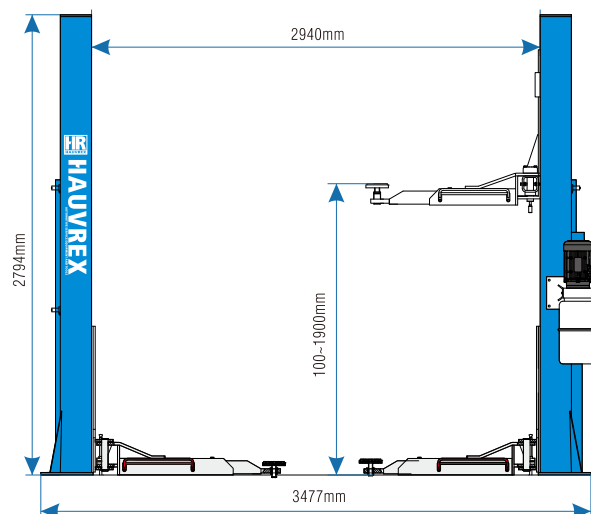

Technical Data

Lifting Capacity	4,000kg
Min. Height	100mm
Max. Lifting Height	1,900mm
Overall Height	2,794mm
Overall Width	3,477mm
Width between Posts	2,940mm
Short Arm Length	760~1,200mm
Long Arm Length	710~1,050mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph