

HTL

3140ASY

 **Min.**
110mm

 **1900mm**
Max.

C **4000kg**
Capacity

4.0 Ton Clear Floor Two-post Lift

Asymmetric column design, dual side manual lock release, double piece column




EAC

Technical Features



Control

Power pack with UP button and manual lowering valve handle



Lifting Arms

Asymmetric 2+3 stages lifting arms increasing overall arm positioning for lifting a variety of different wheel base vehicles



Lifting Pads

Drop-in type single stage threaded lifting arm pads




Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



Lock Release

Safety locks with automatic engagement and dual side manual lock release




Arm Holder

C-type enclosed arm holder gives more strength and safety



Door Protection


Enlarged anti-collision door protection rubber on carriages



Asymmetric Column

30 degree rotated double piece columns for added door opening clearance and interior car access

Technical Drawing

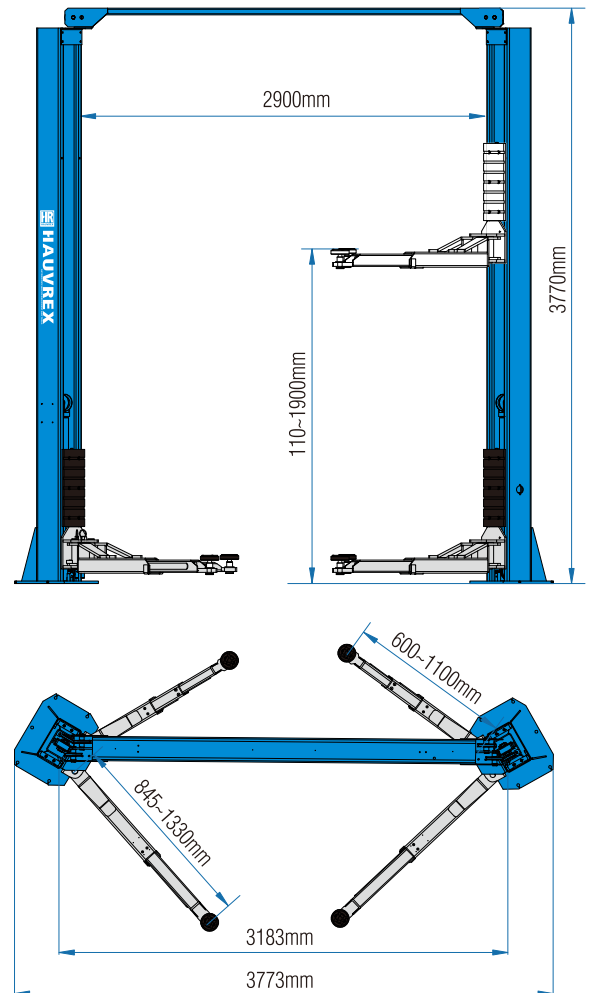

Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	3,770mm
Overall Width	2,773mm
Width between Posts	2,900mm
Short Arm Length	600~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph