

HTL

3150(DD)

Min.
110mm


1900mm
Max.

5000kg
Capacity

Note: HTL3150 chain drive
HTL3150DD direct drive

5.0 Ton Clear Floor Two-post Lift

Single side manual lock release, double piece column

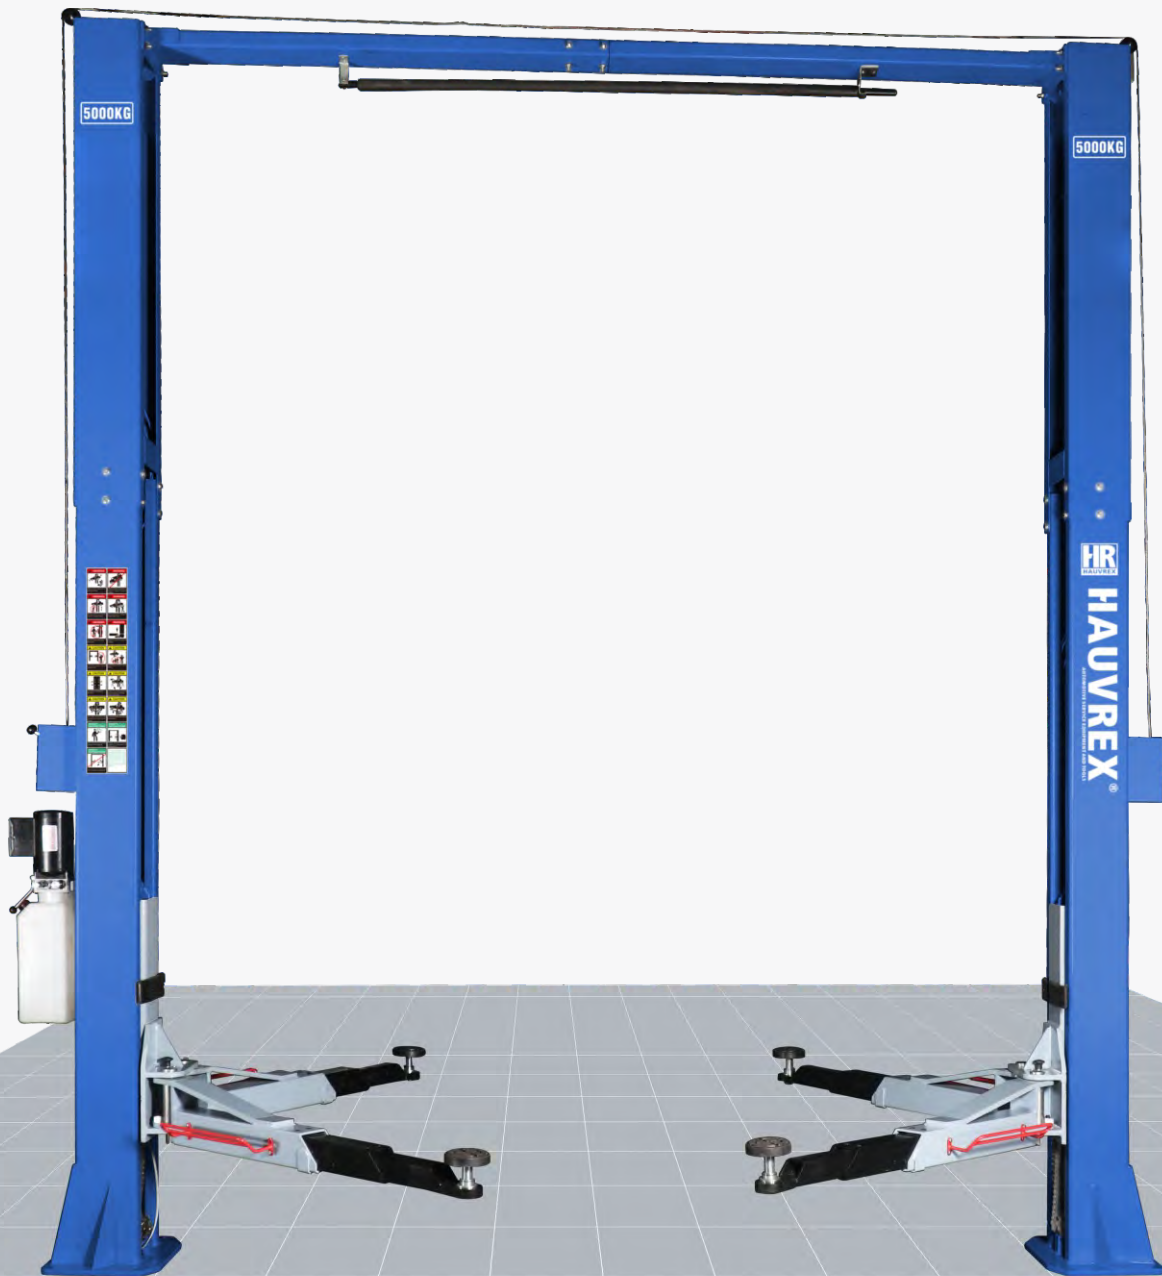

EAC

Technical Features



Control

Power pack with UP button and manual lowering valve handle




Lifting Arms

Asymmetric 2+3 stages lifting arms increasing overall arm positioning for lifting a variety of different wheel base vehicles




Lifting Pad

Drop-in type dual stage threaded lifting arm pads




Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



Lock Release

Safety locks with automatic engagement and single side manual lock release




Foot Protection

Lifting arms equipped with foot protection bars




Door Protection

Anti-collision door protection rubber on carriages



Direct Drive

Low pressure direct drive cylinders eliminating the need for lifting chains (HTL3155DD)

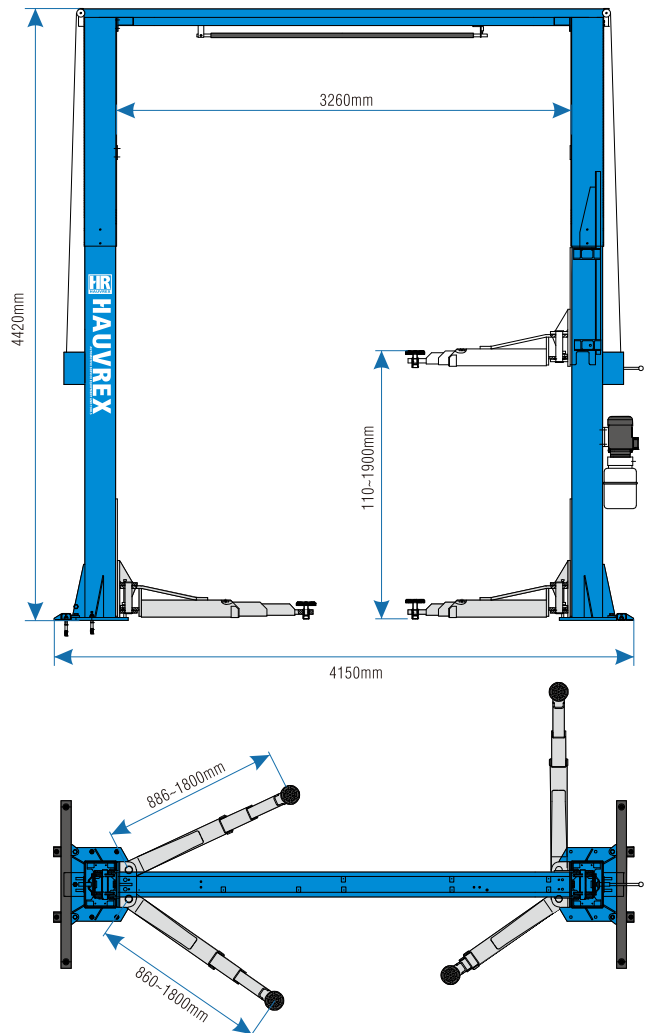

Technical Data

Lifting Capacity	5,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	4,420mm
Overall Width	4150mm
Width between Posts	3,260mm
Lifting Arm Length	886~1,800mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	3.0kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph