

HXL 6835/6840

3.5/4.0 Ton Low Profile Alignment Scissor Lift

With electric rolling jack, Pneumatic lock release



CE EAC

Technical Features



Control

Control cabinet with UP, Down button, main power switch, lock button, power indication light and photocell cut-off button



Safety Lock

Safety lock teeth on both cylinders with automatic engagement and pneumatic lock release



Front Recesses

Adjustable front recesses for turning plates to suit different wheel base vehicles



Side Slip Plate

Side slip plate for wheel alignment measuring and adjustment on rear axle



Wheel Stop



Wheel stops in front side of the platform



Drive-on Ramp

Drive-on ramps features non-skid structure

Technical Drawing

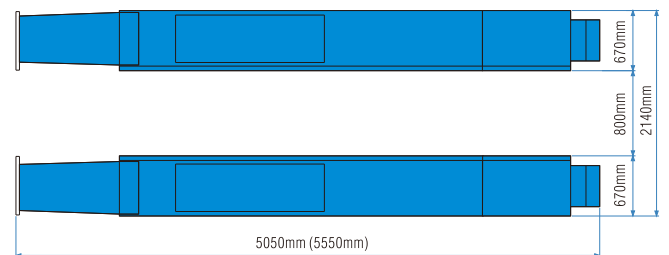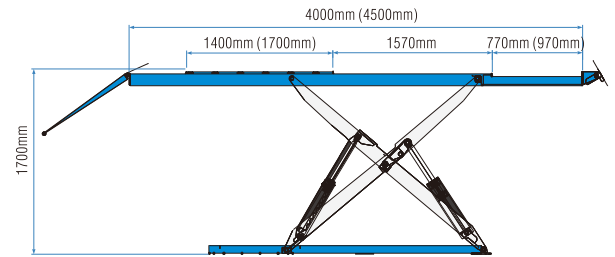

Note: HXL6835 (HXL6840)

Technical Data

Model	HXL6835	HXL6840
Lifting Capacity	3,500kg	4,000kg
Min. Height	180mm	180mm
Max. Lifting Height	1,700mm	1,700mm
Platform Length	4,000mm	4,500mm
Platform Width	670mm	670mm
Distance between Platforms	800mm	800mm
Air Supply	6~8kg/m ³	6~8kg/m ³
Lifting/Lowering Time	55Sec./45Sec.	55Sec./45Sec.
Motor Power	2.2kW	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph	380V/50Hz/3Ph 220V/50Hz/1Ph