


HTL

2440



## 4.0 Ton Two-post Lift with Base

Automatic solenoid lock release

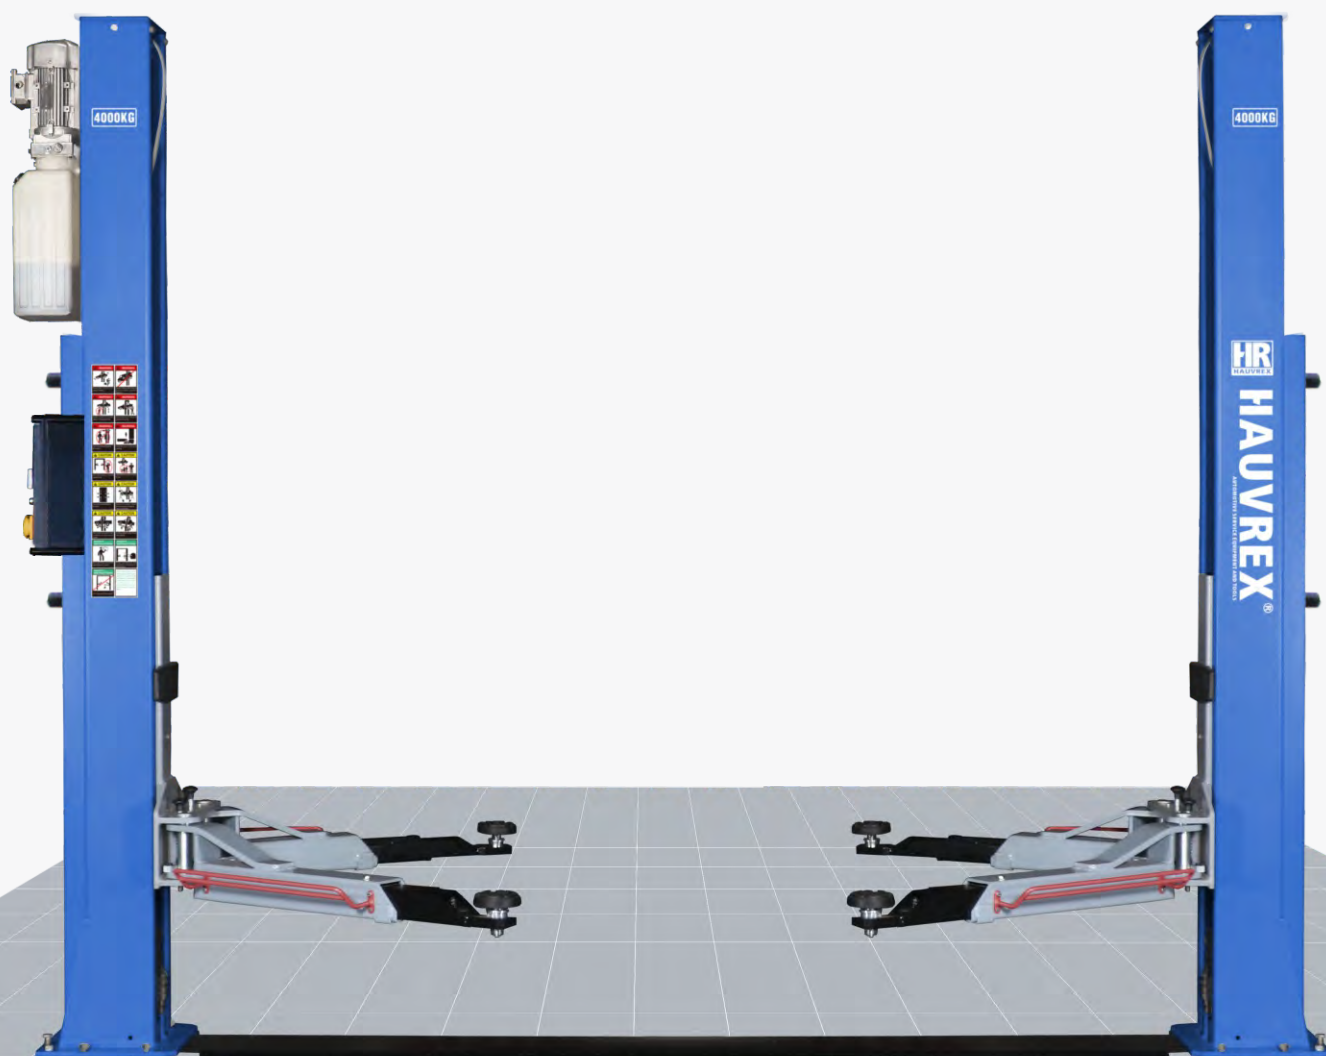

CE EAC

## Technical Features



### Control

24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH




### Lifting Arms

Asymmetric 2-stage lifting arms




### Lifting Pads

Drop-in type dual stage threaded lifting arm pad




### Arm Locks

Automatic arm locking during lifting and automatic unlocking when the arm reaches the floor



### Arm Holder

C-type enclosed arm holder give more strength and safety



### Foot Protection


Lifting arms equipped with foot protection bars



### Door Protection

Anti-collision door protection rubber on carriages

## Technical Drawing

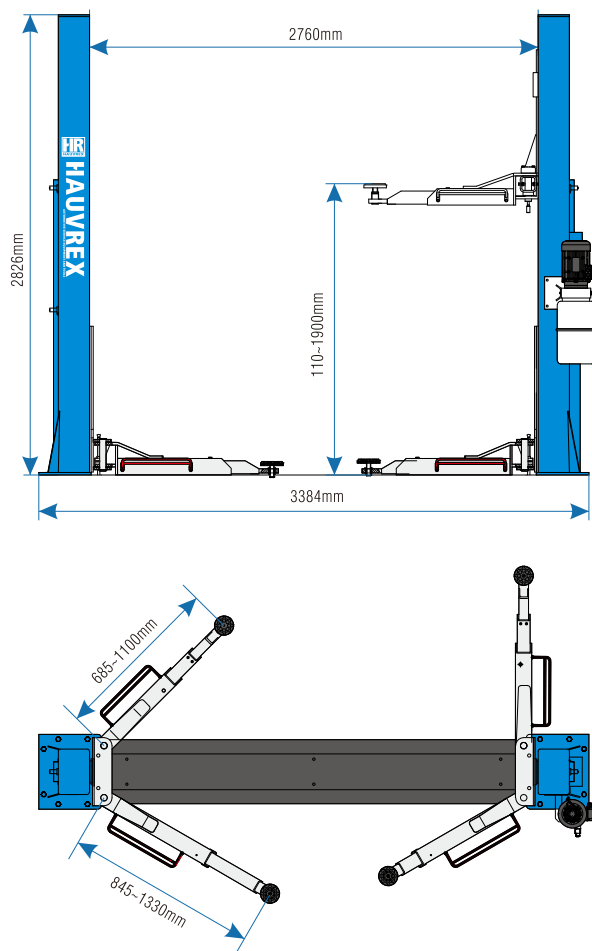

## Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	2,826mm
Overall Width	3,384mm
Width between Posts	2,760mm
Short Arm Length	685~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph