

**HTL**

**2150**



## 5.0 Ton Two-post Lift with Base

Dual side manual lock release




EAC

## Technical Features



### Control

Power pack with UP button and manual lowering valve handle




### Lifting Arms

Asymmetric 2+3 stages lifting arms increasing overall arm positioning for lifting a variety of different wheel base vehicles



### Lifting Pad

Drop-in type single stage threaded lifting arm pads




### Arm Locks

Automatic arm locking during lifting and automatic unlocking when the arm reaches the floor



### Lock Release

Safety locks with automatic engagement and dual side manual lock release




### Arm Holder

C-type enclosed arm holder gives more strength and safety



### Door Protection



Enlarged anti-collision door protection rubber on carriages



### Arm Pad

Rubber pad on rear lifting arms for SUV or Van

## Technical Drawing

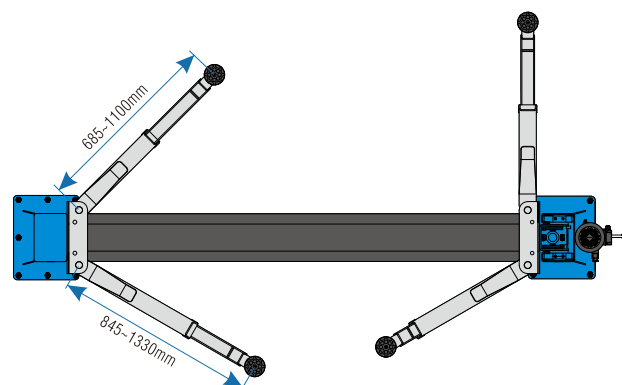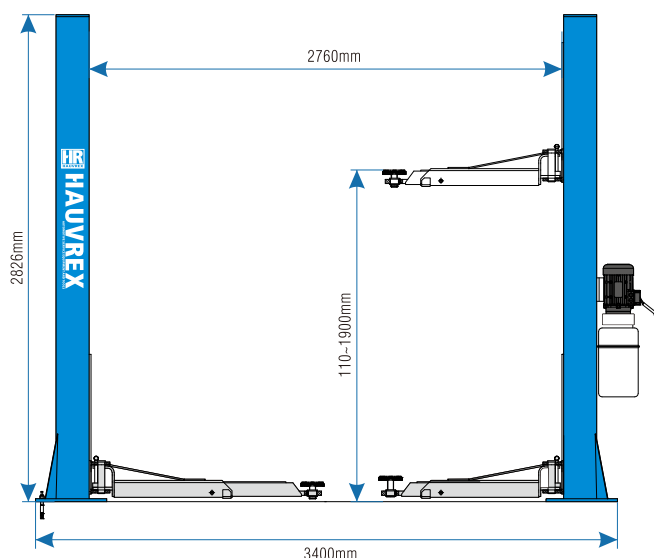

## Technical Data

Lifting Capacity	5,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	2,826mm
Overall Width	3,400mm
Width between Posts	2,760mm
Short Arm Length	685~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph