

**HXL**

**6235**

**Min.**  
105mm

**Max.**  
940mm

**Capacity**  
3500kg

# 3.5 Ton Movable Mid-rise Scissor Lift

Pneumatic lock release  
Electric lock release (Optional)



**CE EAC**

## Technical Features




### Control

24V low voltage control box with UP, DOWN, MAIN POWER SWITCH, power indication light and buzzer



### Dual Cylinders

Dual hydraulic cylinders on each scissor provide super strong lifting force



### Drive-on Ramp

Drive-on ramps which can be locked on level as platform extension




### Limit Switch

Up limit switch to protect over stretch of cylinders



### Foot Protection

Limit switch for foot protection activates the buzzer for the last stage of lowering



### Moving Kit



A set of moving kit as standard accessory



### Control Trolley

Power pack and control box on moving trolley

## Technical Drawing

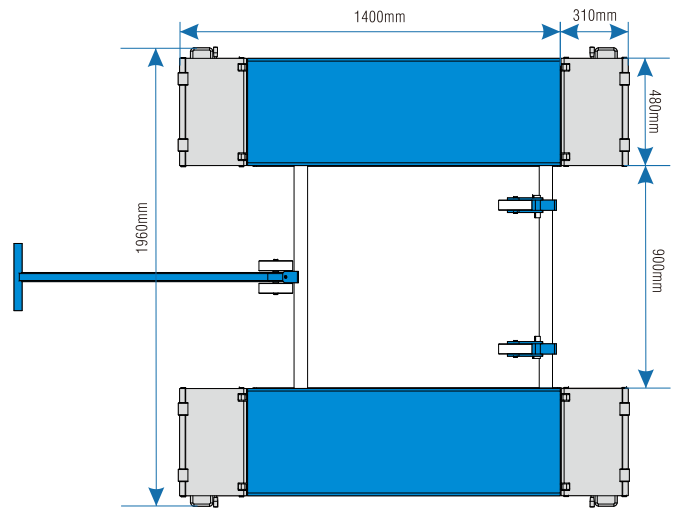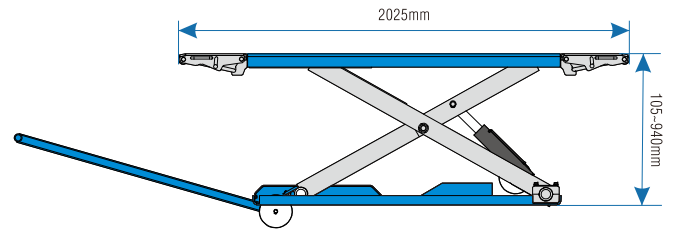

## Technical Data

Lifting Capacity	3,500kg
Min. Height	105mm
Max. Lifting Height	940mm
Platform Length	2,025mm
Platform Width	1,960mm
Distance between Platforms	900mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph