


HTL

3140



## 4.0 Ton Clear Floor Two-post Lift

Dual side manual lock release, double piece column

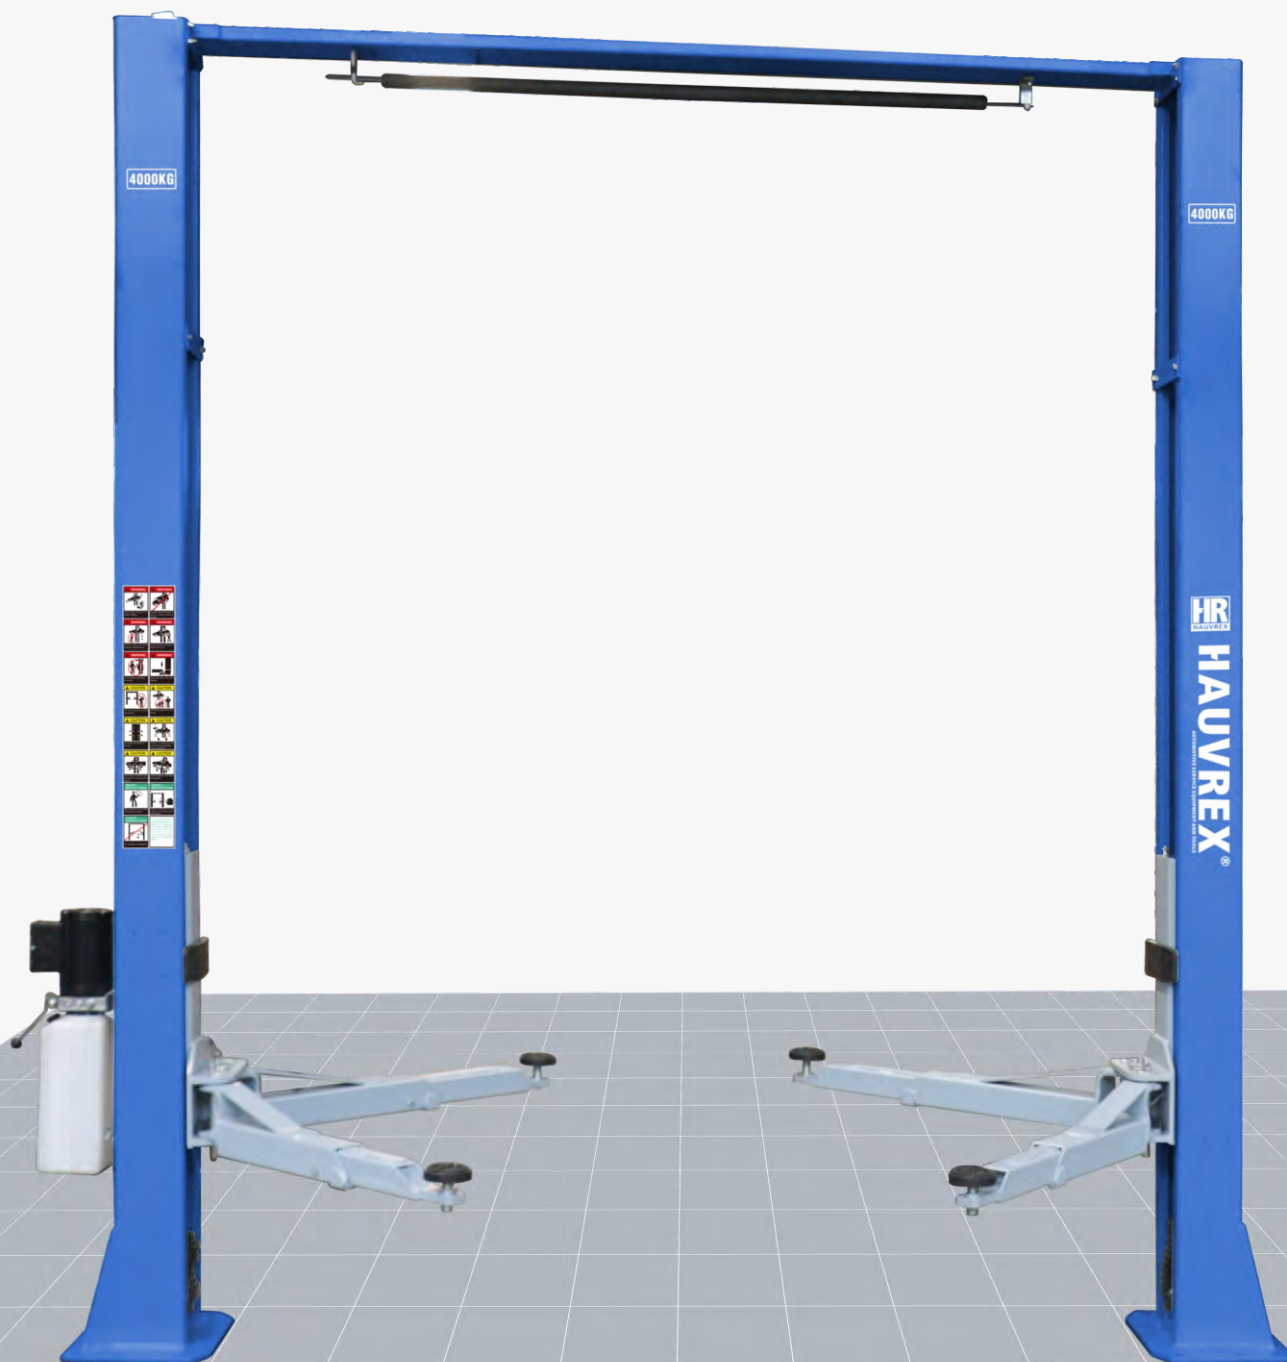

EAC

## Technical Features



### Control

Power pack with UP button and manual lowering valve handle



### Lifting Arms

Asymmetric 2-stage lifting arms



### Lifting Pad

Drop-in type single threaded lifting arm pad



### Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



### Arm Holder

C-type enclosed arm holder give more strength and safety




### Safety locks

Safety locks on each column every 80mm



### Door Protection


Anti-collision door protection rubber on carriages



### Overhead Protection

Padded overhead protection bar automatically stops the lift should a vehicle come in contact with overhead structure.

## Technical Drawing

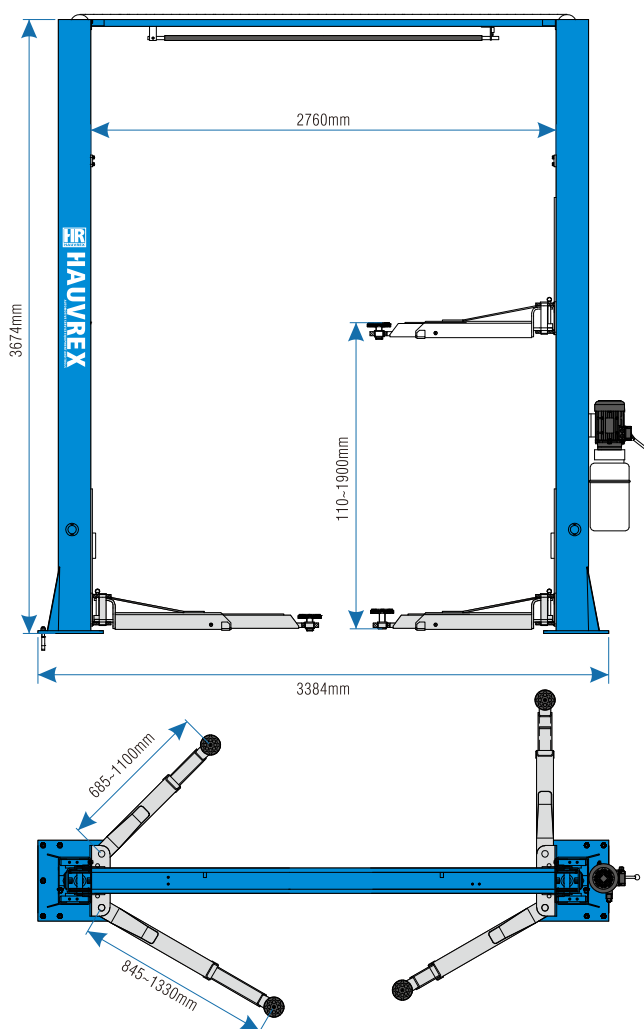

## Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	3,674mm
Overall Width	3,384mm
Width between Posts	2,760mm
Short Arm Length	685~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph