

HTL

3440ASY



4.0 Ton Clear Floor Two-post Lift

Asymmetric column design, automatic solenoid lock release, double piece column




CE EAC

Technical Features




Control

24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH



Lifting Arms

Asymmetric 2+3 stages lifting arms increasing overall arm positioning for lifting a variety of different wheel base vehicles



Lifting Pads

Drop-in type single stage threaded lifting arm pads



Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor




Arm Holder

C-type enclosed arm holder gives more strength and safety



Door Protection

Enlarged anti-collision door protection rubber on carriages



Asymmetric Column


30 degree rotated double piece columns for added door opening clearance and interior car access



Power Pack

Power pack with black motor and plastic oil tank

Technical Drawing

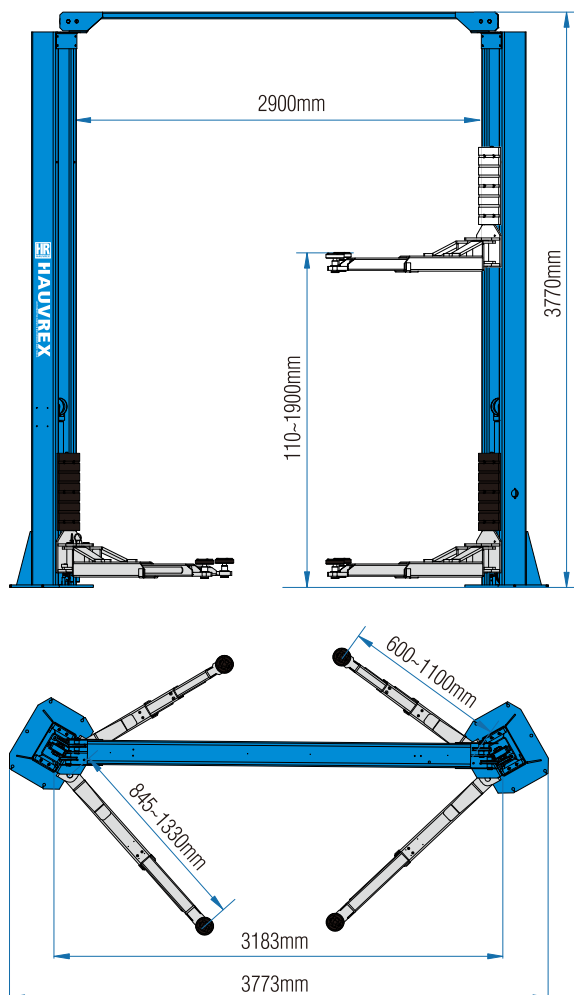

Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	3,770mm
Overall Width	3,773mm
Width between Posts	2,900mm
Short Arm Length	600~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph