

**HTL**

**2850**



## 5.0 Ton Two-post Lift with Base

Automatic solenoid lock release, reinforcement bar



CE EAC

## Technical Features



### Control

24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH




### Lifting Arms

Symmetric 3+3 stages lifting arms




### Lifting Pad

Drop-in type dual stage threaded lifting arm pads




### Arm Locks

Automatic arm locking during lifting and automatic unlocking when the arm reaches the floor



### Arm Holder

C-type enclosed arm holder give more strength and safety



### Foot Protection

Lifting arms equipped with foot protection bars



### Reinforcement Bar



Reinforcement bar for bad concrete floor



### Power Pack

Power pack with aluminum motor

## Technical Drawing

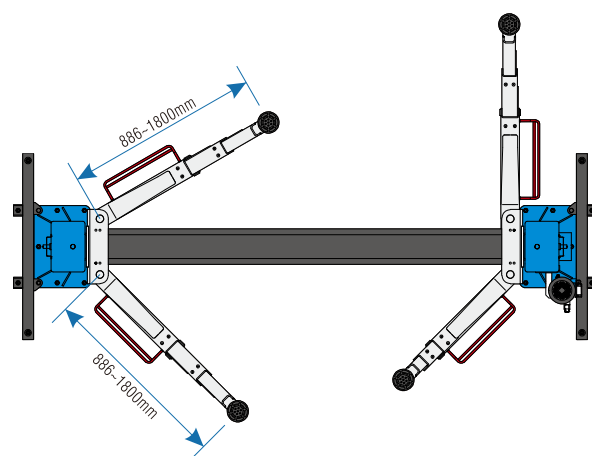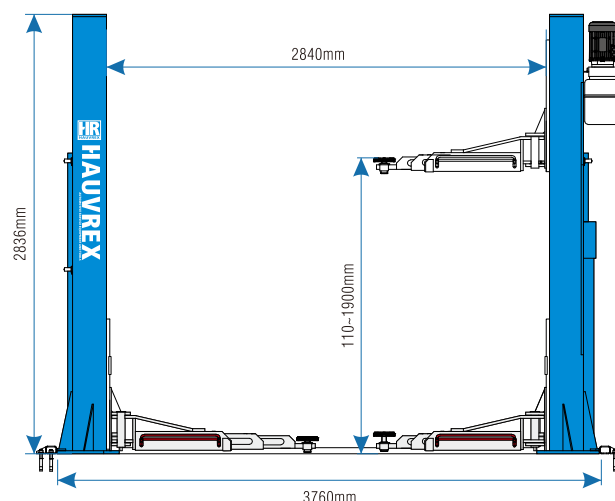

## Technical Data

Lifting Capacity	5,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	2,836mm
Overall Width	3,760mm
Width between Posts	2,840mm
Lifting Arm Length	886~1800mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	3.0kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph