

# HTL

# 3440RD




## 4.0 Ton Clear Floor Two-post Lift

Direct drive, Single point manual lock release, automatic lifting, manual lowering



CE EAC

## Technical Features



### Control

24V low voltage control box with UP, emergency stop and MAIN POWER SWITCH




### Lifting Arms

Asymmetric 2+3 stages lifting arms increasing overall arm positioning for lifting a variety of different wheel base vehicles



### Lifting Pad

Drop-in type single threaded lifting arm pad



### Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



### Lock Release

Safety locks with automatic engagement and single side manual lock release



### Direct Drive

Low pressure direct drive cylinders eliminating the need for lifting chains



### Door Protection



Anti-collision door protection rubber on carriages



### Power Pack

2.2kW power pack with black motor and manual lowering valve handle

## Technical Drawing

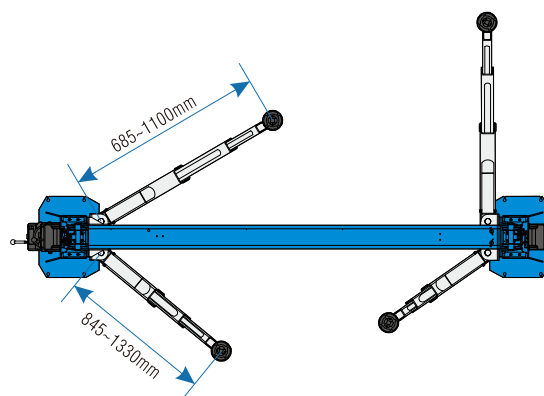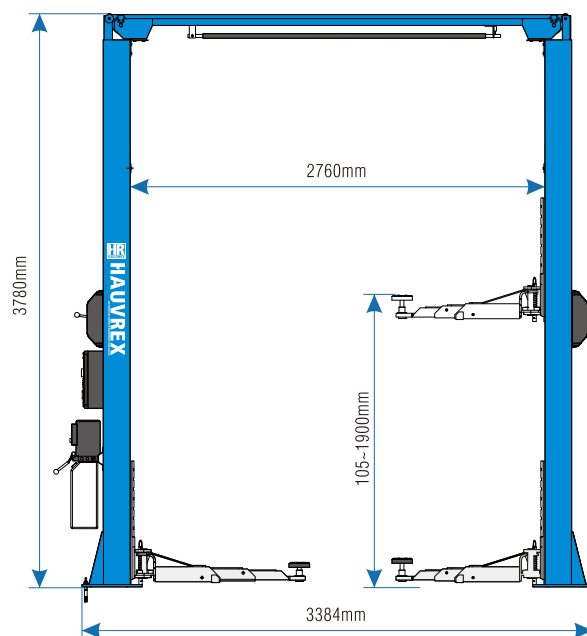

## Technical Data

Lifting Capacity	4,000kg
Min. Height	105mm
Max. Lifting Height	1,900mm
Overall Height	3,780mm
Overall Width	3,384mm
Width between Posts	2,760mm
Short Arm Length	685~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph