


HTL

3140S



4.0 Ton Clear Floor Two-post Lift

Single side manual lock release, double piece column

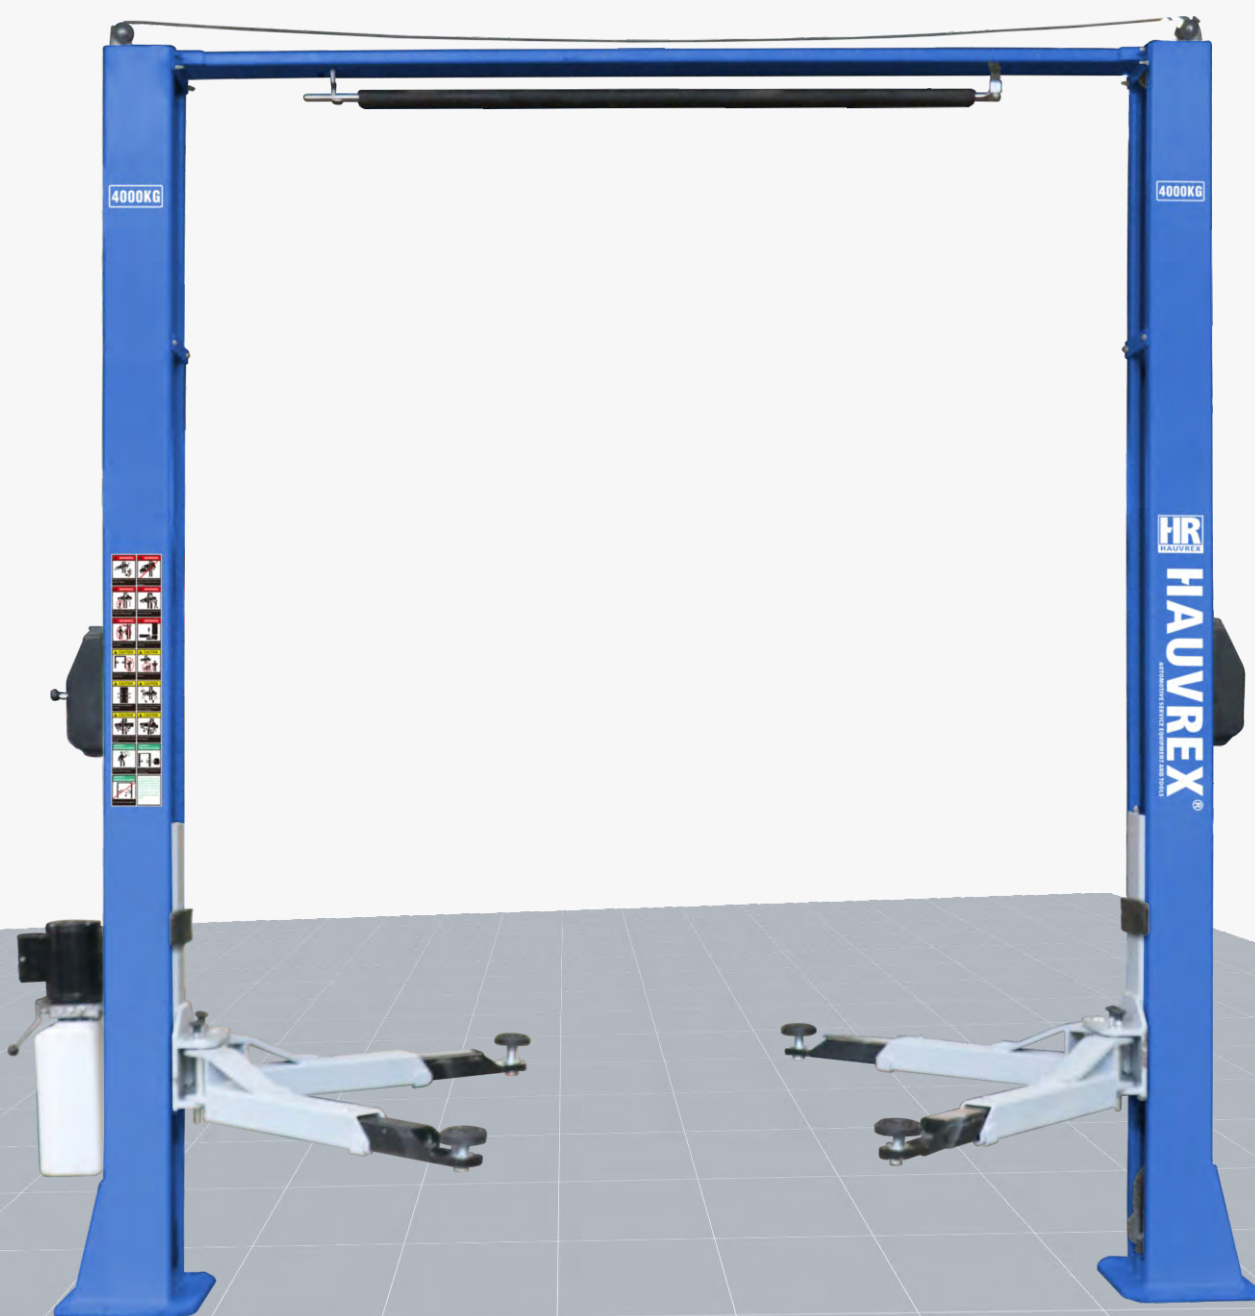

EAC

Technical Features



Control

Power pack with UP button and manual lowering valve handle



Lifting Arms

Asymmetric 2-stage lifting arms




Lifting Pad

Drop-in type single stage threaded lifting arm pad



Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



Arm Holder

C-type enclosed arm holder give more strength and safety




Lock Release

Safety locks with automatic engagement and single side manual lock release



Door Protection


Anti-collision door protection rubber on carriages



Overhead Protection

Padded overhead protection bar automatically stops the lift should a vehicle come in contact with overhead structure

Technical Drawing

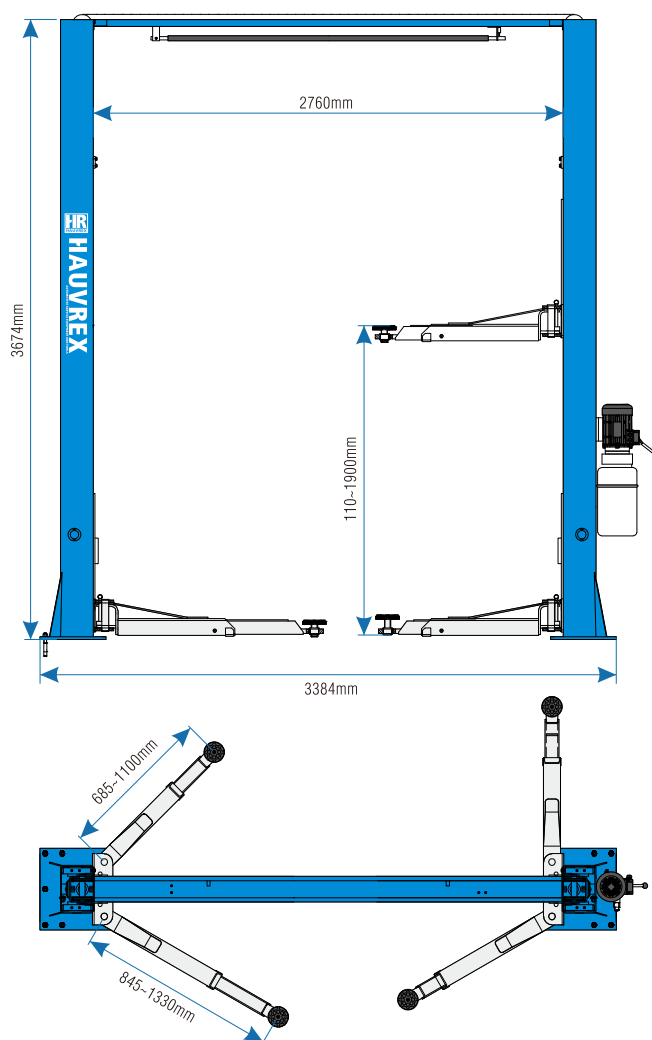

Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	3674mm
Overall Width	3,384mm
Width between Posts	2,760mm
Short Arm Length	685~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph