

HTL

2140



4.0 Ton Two-post Lift with Base

Dual side manual lock release



EAC

Technical Features



Control

Power pack with UP button and manual lowering valve handle



Lifting Arms

Asymmetric 2-stage lifting arms



Lifting Pad

Drop-in type single stage threaded lifting arm pad




Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



Lock Release

Safety locks with automatic engagement and dual side manual lock release



Arm Holder

C-type enclosed arm holder gives more strength and safety



Safety locks


Safety lock on the column every 80mm.



Door Protection

Anti-collision door protection rubber on carriages

Technical Drawing

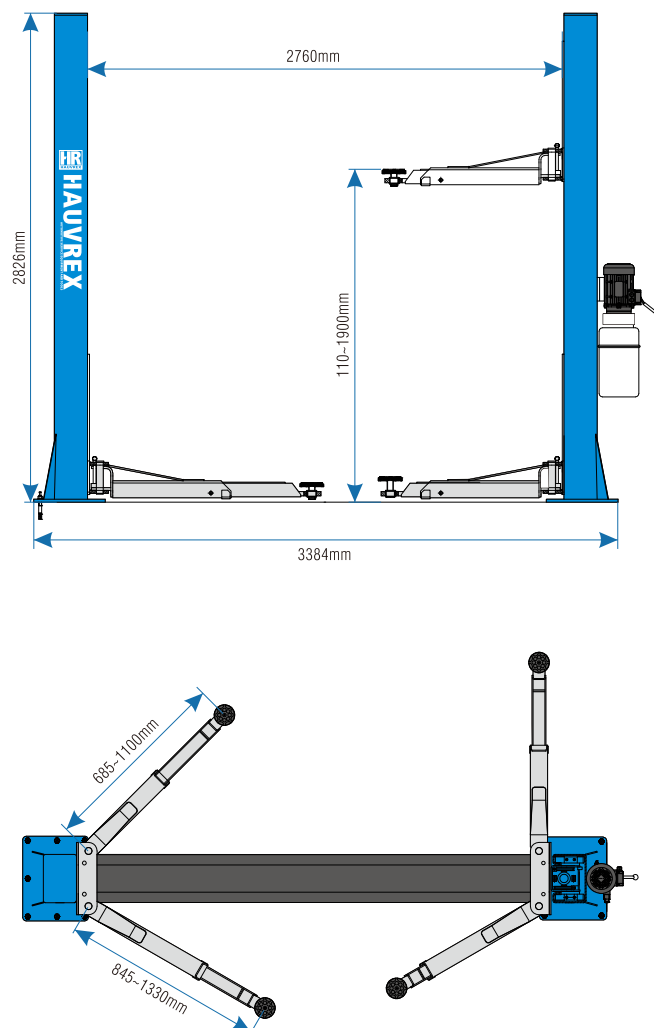

Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	2,826mm
Overall Width	3,384mm
Width between Posts	2,760mm
Short Arm Length	685~1,100mm
Long Arm Length	845~1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph